

RoboSHOT 12E and 30E SDI Cameras

Current Release

RoboSHOT® Elite SDI 3.1.0

May 13, 2019

New Features

- The previously unused Position 0 on the rotary switch now enables software control of video output resolution. When the switch is set to software control mode, the administrator sets video resolution via the web interface, on the General tab of the System page.

Improvements

- In the admin web interface, various camera behavior settings have moved from soft DIP switches to the General tab of the System page. The basic behavior settings (camera ID, IR on/off, image flip, baud rate, control mode) remain on the DIP switches tab of the System page.
- Some parameters were incorrectly stored in CCU scenes and in presets stored with color information. This has been fixed.
- Executing several pan, tilt, or zoom to absolute position commands in quick succession could generate error messages. This has been fixed.

Release History

RoboSHOT Elite SDI 3.0.0

March 15, 2019

- Initial release.

Firmware Update Instructions – RoboSHOT SDI


Requirements

- Network access to the camera
- The web interface’s admin password, if it has been changed from factory default
- The .p7m firmware file for the camera (download from the RoboSHOT SDI product page’s Resources or Firmware tab)


Step-By-Step Process

Note: Your camera’s web interface will display different model and firmware information from the screen shots in this document. The process for updating firmware is the same for all cameras in the RoboSHOT family.


1. Enter the IP address for the camera into the address bar of a web browser.
 - You can obtain the IP address for the camera using the Vaddio IR Remote Commander. Aim at the camera and press the Data Screen button. The connected display shows the camera’s IP address.
2. Log in as admin. The default password is password.

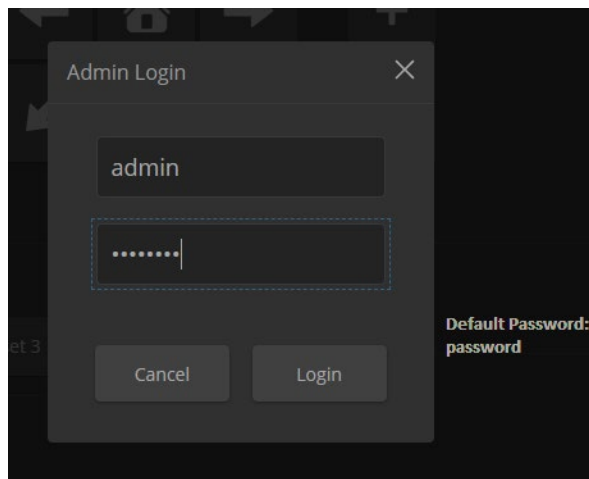

3. Navigate to the System page.
4. Select Choose File, then browse to the downloaded firmware and select it. The filename ends with .p7m.
5. Select Begin Firmware Update.

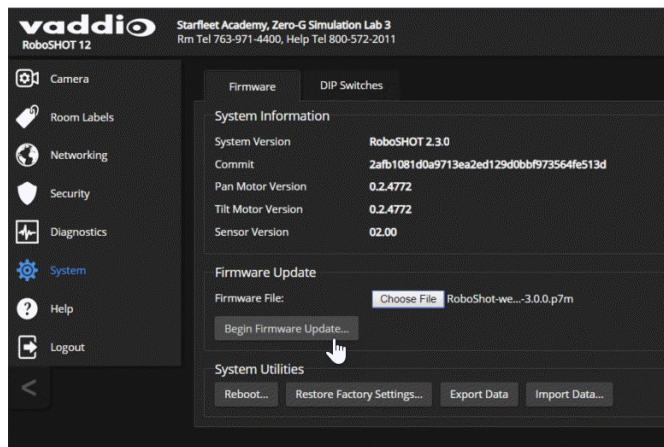

6. Read and understand the information in the Confirm dialog box. It's dull, but it could save you some time and aggravation.

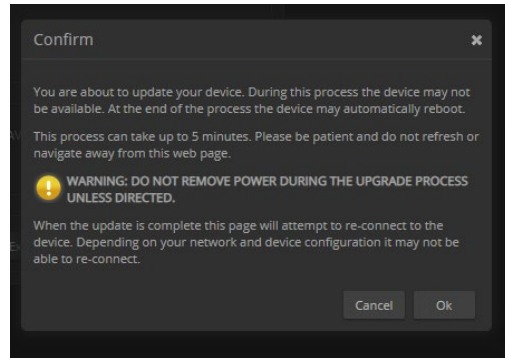

7. Select Continue. A progress message box opens and the indicator light on the front of the camera turns yellow. If the update process presents warnings or error messages, read them carefully.
8. The camera reboots when the update is complete.

Caution

The camera must remain connected to power and to the network during the update. Interrupting the update could make the camera unusable.

This update can take up to 5 minutes to complete; the pop-up message window will identify the progress of the update.

While you're waiting, here are a few ideas for occupying your time:

- Imagine a new kind of furniture. How and when do you use it?
- Decide which kind of plant most resembles your favorite celebrity. Or your least favorite one.
- If you were featured on the news, what would you want the news story to be about?

After the update is complete, the System page will display the new firmware version under System Information. Enjoy that 'New Firmware Smell'!

If the update procedure is interrupted for any reason the product may need to be returned to Vaddio for updating. If the update does not seem to run, DO NOT TURN OFF THE PRODUCT OR UNPLUG IT. CALL TECH SUPPORT IMMEDIATELY.

If you have any questions, call Tech Support at Vaddio: (+1) 763-971-4428 or 1-800-572-2011.

Vaddio is a brand of Legrand AV Inc. · www.legrandav.com · Phone 800.572.2011 / +1.763.971.4400 · Fax +1.763.971.4464
Email av.vaddio.support@legrand.com

Visit us at support.vaddio.com for firmware updates, specifications, drawings, manuals, and technical support information, and more.

Vaddio is a registered trademark of Legrand AV Inc. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All patents are protected under existing designations. Other patents pending.

©2019 Legrand AV Inc.

A brand of  **legrand**