



# PRODUCTIONVIEW™ RACK ENCLOSURE & PRODUCTIONVIEW SLIDING SHELF

**998-5000-200: ProductionVIEW Rack Enclosure**

**998-5000-210: ProductionVIEW Sliding Shelf**

Fits ProductionVIEW HD, ProductionVIEW HD MV and ProductionVIEW HD-SDI MV

**998-5000-211: ProductionVIEW Precision Camera Controller Sliding Shelf**



ProductionVIEW Rack Enclosure with  
ProductionVIEW Sliding Shelf  
(Vaddio equipment not included)

**Overview:**


The Vaddio™ ProductionVIEW Rack Enclosure is a dual bay rack mounting system with an 8 RU upper bay, and a 5 RU lower bay. It is designed to install a variety of rack-mountable equipment.

With the optional ProductionVIEW Sliding Shelf system, a ProductionVIEW controller can easily be stored out of the way when not in use. Made of light weight, yet strong aluminum, the back panel has wire tie slots, and holes for mounting the enclosure to a tabletop. The black powder coat finish is durable and long lasting. Two Rack Bays can be bolted together as an option.

**998-5000-200, ProductionVIEW Rack Enclosure Features:**

- Dual Rack Bay Design (upper and lower)
- 8-RU Upper Rack Bay (14"/35.56cm) and 5-RU Lower Rack Bay (8.75"/22.23cm)
- Aluminum construction with attractive black powder coat finish
- 25° Slant on upper bay for optimal viewing of the front panels

**Dimensions** (dimensional drawings available at [support.vaddio.com](http://support.vaddio.com))

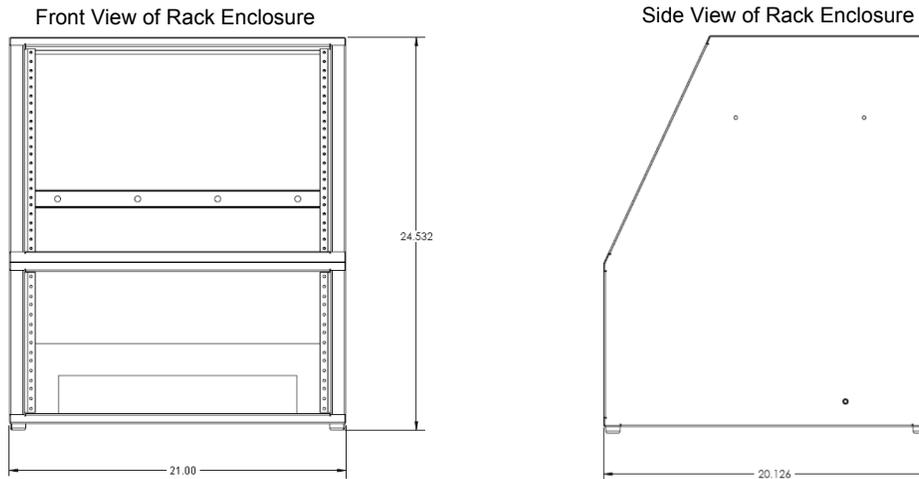

**ProductionVIEW Rack Enclosure Sliding Shelves**



**998-5000-210: ProductionVIEW Sliding Shelf**  
Fits Models ProductionVIEW HD, ProductionVIEW HD MV, ProductionVIEW HD-SDI MV



**998-5000-211: ProductionVIEW Precision Camera Controller Sliding Shelf**

**ProductionVIEW Sliding Shelf Includes:**


- One (1) Sliding Shelf
- Two (2) Angle Brackets (left and right) for mounting the ProductionVIEW or Precision Camera Controller
- Four (4) 8-32 x 3/8" screws
- Eight (8) 10-32 x .313" black oxide screws
- Two (2) 8-32 x 3/8" flat head screws
- Two (2) 1/4" flat washers
- Six (6) 8-32 Keps nuts



**Installing the Sliding Shelf**

1. Locate the two (2) 8-32 flat head screws, two (2) flat washers, and two (2) Keps nuts.
2. Loosen wing nuts on the "L" brackets of the sliding shelf.
3. Lay sliding shelf into bottom of enclosure.
4. Slide flat head screw into one hole on the back side of the rack console.
5. Place a washer in between the rack enclosure side panel and the L bracket (see below).
6. Slide the L-shaped tab attached to the wing nut onto the flat head screw, and then tighten the Keps nut onto the flat head screw.
7. Repeat the process for the other side of the shelf.
8. Fasten the front of the sliding shelf to the Enclosure using four (4) 10-32 rack screws (not included).
- 9.

Diagram showing the back of the Sliding Shelf installation (top view)

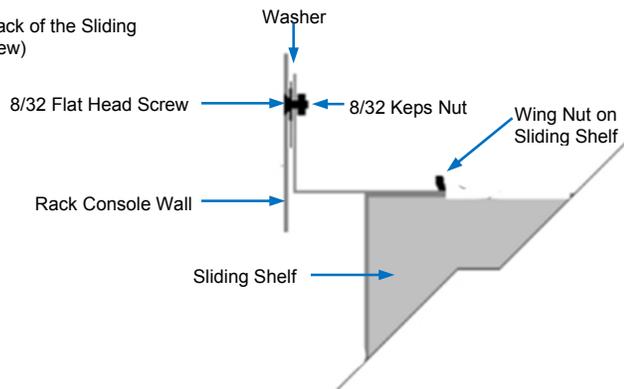

10. Test the shelf to confirm that it slides in and out smoothly, and then tighten all of the screws down.
11. Slide the Shelf out, and match the holes in the shelf with the angle brackets for the ProductionVIEW console. Slide the four (4) 8-32 x 3/8" screws through the holes.
12. From the bottom of the Shelf, connect the remaining four (4) Keps nuts to the screws, and hand-tighten only.
13. Slide the ProductionVIEW console on for proper fit. Carefully remove the ProductionVIEW console, so as not to move the angle brackets, and then tighten the screws down.
14. Place the ProductionVIEW console back onto the sliding shelf. Line up the holes on the sides of the angle brackets with the holes in the ProductionVIEW console. Use the remaining four (4) 10-32 x .313" screws to mount the ProductionVIEW to the Mounting Tabs (see picture to the right).

Four 10-32 Screws Attach Console to Mounting Angles



**Hardware Warranty**

Please see the Vaddio website at [support.vaddio.com](http://support.vaddio.com) for the Vaddio Statement of Warranty for all Vaddio Products. The Statement of Warranty covers the policies and procedures of the Hardware Warranty, Exclusions, Customer Service, Technical Support, Return Material Authorizations (RMA), Voided Warranty, Shipping, Handling and Products Not Under Warranty. The Vaddio Warranty Statement supercedes all other published warranty statements heretofore in content and coverages. Vaddio Technical Support can be contacted through the Vaddio website or through e-mail support at [support@vaddio.com](mailto:support@vaddio.com).

Learn more about our cameras, audio devices and controllers at 800-572-2011 or [vaddio.com](http://vaddio.com)

©2014 Vaddio - All Rights Reserved. Reproduction in whole or part without written permission is prohibited. Specifications and pricing are subject to change without prior notice or obligation. Vaddio and ProductionVIEW are trademarks of Vaddio. All other trademarks are the property of their respective owners. Document Number 341-722 Rev C, SD: 68440.1

